

Pop Up Power IGU - In Ground Units

- Can be used in smaller spaces to supply electricity and telephone connection.
- Double locking lid – can be operated with lid locked down.
- Lid raised manually – gas strut assisted.
- Recessed Cover to accept paving Covers tested unfilled to FACTA class B loading. (Pedestrian Precincts, Forecourts, Commercial Delivery & Parking areas).

Dimensions: Cover size 386mm x 570mm Available in 3 box depths –



Slim: 250mm deep

Manufactured from high grade mild steel - Hot Dip Galvanised to BS EN: ISO1461

Electrical Configurations available:
Single phase incoming supply only

Configuration

- A: 1 x 32A IP67 plus 1 x 16A IP67
- B: 2 x 16A IP67

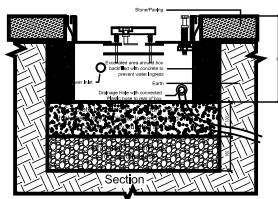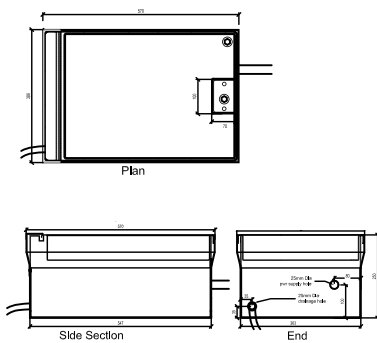



Standard: 470mm deep

Manufactured from high grade mild steel - Hot Dip Galvanised to BS EN: ISO1461

Electrical Configurations available:
Single phase incoming supply only

Configuration

- C: 1 x 32A IP67 plus 1 x 16A IP67
- D: 2 x 32A IP67
- E: 2 x 16A IP67

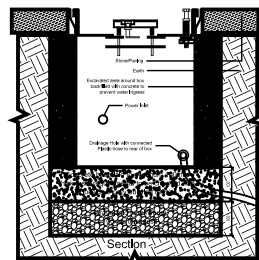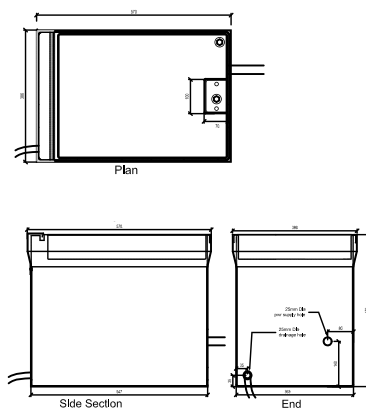

Standard: 570mm deep

Manufactured from high grade mild steel - Hot Dip Galvanised to BS EN: ISO1461

Electrical Configurations available:
Single or 3 phase incoming supply

Configuration

- F: 1 x 125A IP67
- G: 1 x 63A IP67
- H: 2 x 32A IP67 plus 2 x 16A IP67
- I: 1 x 32A IP67 plus 3 x 16A IP67

