


REIF ■ DuraLink®

The REIF DuraLink® adjustable pedestal system starts from 41mm upwards and has a 500kg loading per pedestal. This system is designed to accommodate curved and irregular areas in addition to the traditional installation methods.

This unique system comprises of adjustable pedestal and support rails that are one-third the weight of steel. All associated fittings and components also meet the Class A rating criteria.

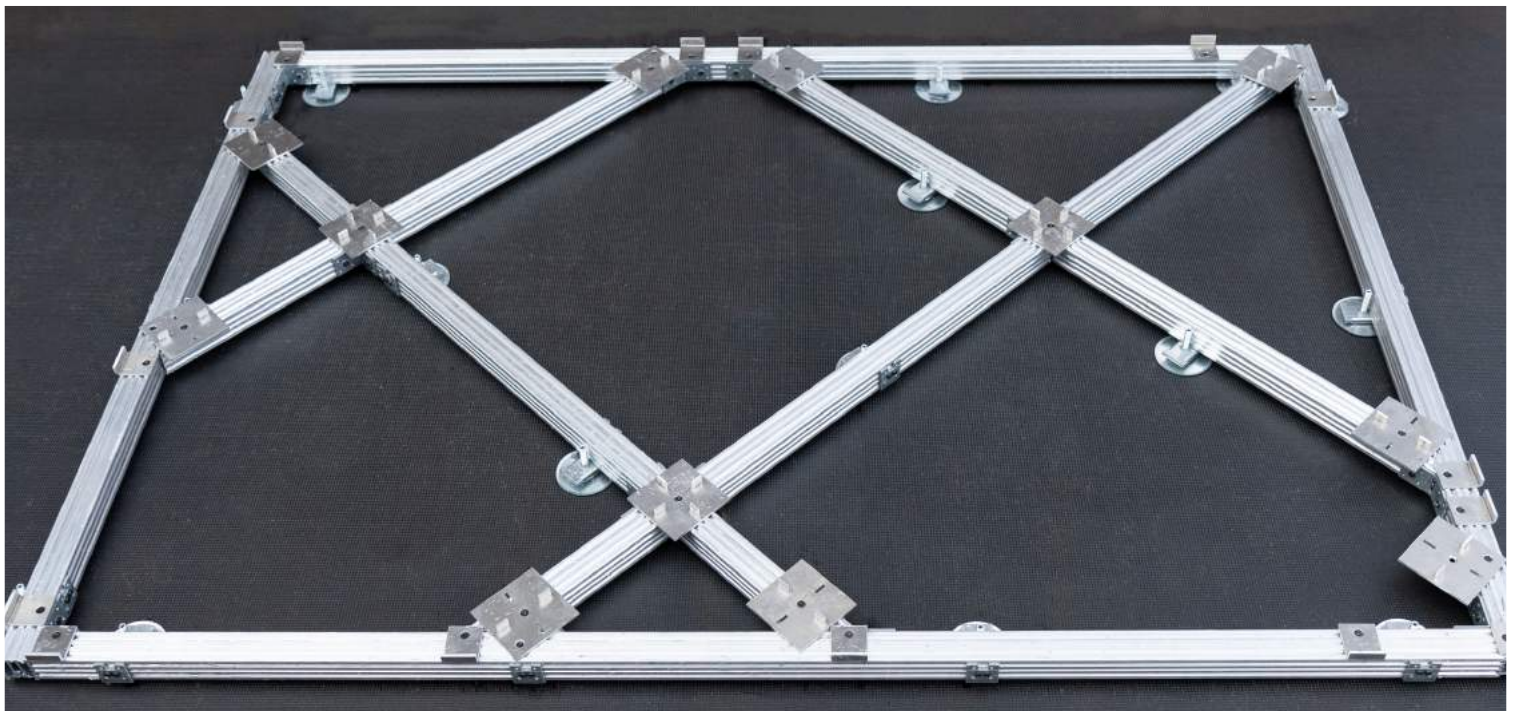

The REIF DuraLink® system can be used with other fire-rated compatible materials, for example, aluminium, porcelain, stone and concrete, to comply with current Class A1 building fire regulations.



