



[www.buzonuk.com](http://www.buzonuk.com)



## Technical Data Sheet-PB

**PB-0-S18** Adjustable from **18** to **28**mm

### COMPONENTS

The PB-0-S18 is composed of 2 pieces  
(Top + base)

### CHARACTERISTICS

Top:  $\varnothing$  170mm, 227cm<sup>2</sup>

Base:  $\varnothing$  197mm, 305cm<sup>2</sup>

Weight: 195gr

Height adjustable from 18 to 28mm

With addition of U-PH5 slope corrector, the PB-S is adjustable in height from 32 to 42mm and slope from 0 to 5%

### MATERIAL

Copolymer polypropylene (CPP)

Composition: +/-80% first grade pre-selected recycled PPC, and +/-20% Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: -30°C to +80°C

### PACKAGING

Pieces per carton: 24 pedestals




Carton weight: 5,16 kg

Carton dimension: 602 x 402 x 105mm

Cartons per pallet: 120pcs

Pieces per pallet: 2880pcs

Pallet dimensions: 100 x 120 x 221cm

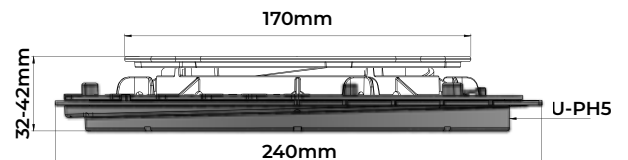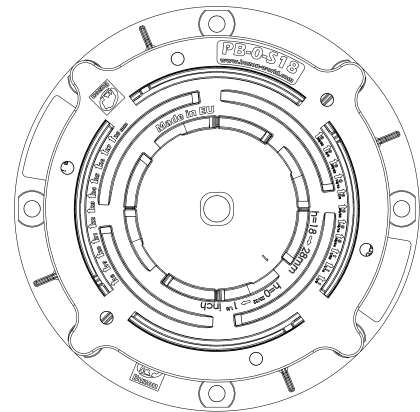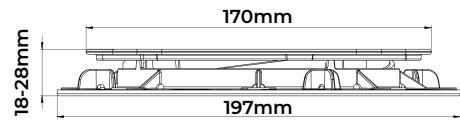

## APPLICATIONS

Buzon pedestals can be used for a wide range of outdoor applications, such as terraces, pool decks and water features, in landscape areas and on rooftops... Finishing materials can be freely specified by the designer. Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels. Buzon pedestals can be installed on a wide range of solid and stable substrates, such as concrete slabs, cement screeds, waterproof membranes and insulation panels.

### Batten Holder



DPH-KIT-5

### Batten Holder



### Spacer Tabs



Thickness:  
2, 3 and 4,5mm

### Shims



U-E10 (T- 1mm)  
U-E20 (T- 2mm)

## COMPRESSION TEST\*

Performed on the full (1/1), half (1/2) and quarter (1/4) surface of the head (1kN= 1kg/F= 224,8 lbF)

Position	Height (mm)	Yield strength** (kN)	Yield strength (lbF)	Breaking load (kN)	Breaking load (lbF)
1/1	28	10 (1000 kg)	2248	21,43 (2143 kg)	4817
1/2	28	5 (500 kg)	1124	11,52 (1152 kg)	2590
1/4	28	2,5 (250 kg)	562	6,18 (618 kg)	1389

\* Tests carried out by SIRRIS

\*\* The yield point is the stress from which a material stops deforming in an elastic, reversible manner and thus begins to irreversibly deform (ISO472 :2013)

## SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

sales@buzonuk.com +44 (0)20 8614 0874