



www.buzonuk.com



## Technical Data Sheet

**U-EDGE** (PATENT PENDING)

### COMPONENTS

The U-EDGE is composed of 1 piece

### CHARACTERISTICS

Weight: **0,087 kg**

Additional height: **12 mm**

Space between the wall and the tile: **5mm**

### MATERIAL

Copolymer polypropylene (CPP)

Composition: +/- **80%** first grade pre-selected recycled PPC, and +/- **20%** Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: **-30 C° to +80 C°**

### PACKAGING

Pieces per carton: **pcs**



Carton weight: **kg**

Carton dimension: **mm**

Cartons per pallet: **pcs**

Pieces per pallet: **pcs**

Pallet dimensions: **cm**

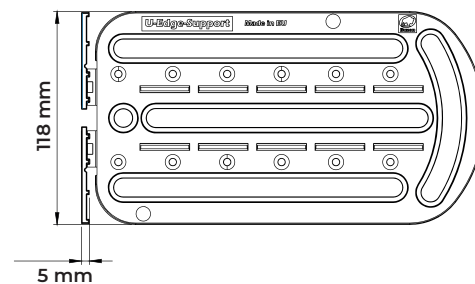

### APPLICATIONS

Use at the edge of the wall.

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels.

### SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

sales@buzonuk.com +44 (0)20 8614 0874