



2 System supplements Lambda Window



2.1 Market launch Lambda 77 L opening out

The new side-hung or top-hung projecting out window construction opening out will be added to the Lambda 77 L programme with immediate effect. Two sash profiles are offered: B803271 which can house Hueck fittings or B803270 for gear locks (espagnolette fittings). Sash dimensions of up to 2000 mm x 2200 mm have been tested and can be realized in accordance with EN 14351 and BS 6375. It is suitable for a glass thickness between 24 and 52 mm in the fixed frame and between 22 and 54 mm in the sash.

The new design can be combined with the Lambda 77 L modular system. In addition, new fixed frames/insert frames and interlocking frames with an interlocking width of 28 and 38 mm have been added.

Product features

- Thermal insulation: U_w value of up to 0.9 W/m²K
- Water tightness in accordance with EN 12208: Class E 1050
- Air permeability in accordance with DIN EN 12 152: Class 4
- Resistance to wind load: Class C4/C5

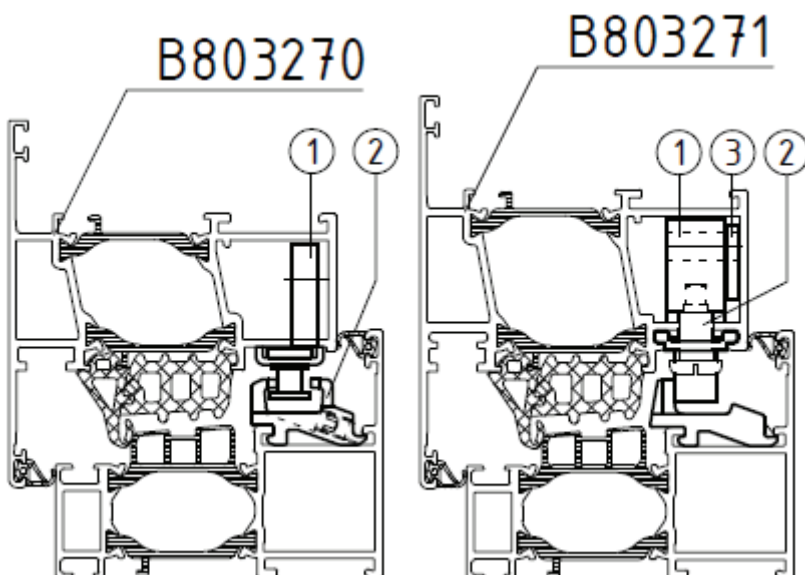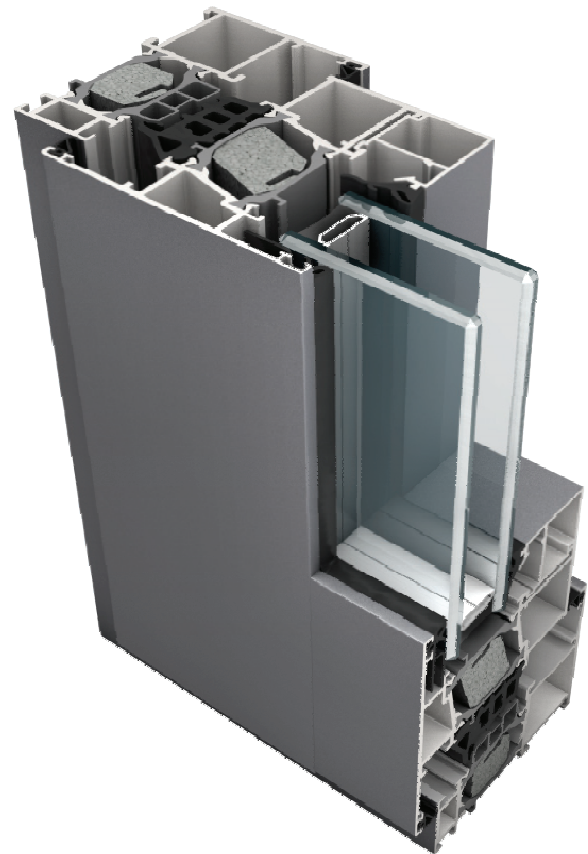

Documentation

- Catalogue documents can be found in the annex and on our homepage.
- The series extension can be planned and calculated in HueckTec.